


Surface Parking:

- The lighting in the parking and drive aisle areas shall be provided by full cut-off single and double-headed downlights on lampposts
 - Lamppost height shall be kept to a minimum, based on site layout and context
- The lighting in the pedestrian walkways shall be provided by full cut-off single-headed lighting fixtures on lampposts
 - Fixture head shall be between 3.5 and 4.5 metres above the walkway surface
- Minimum average maintained illumination levels shall be:
 - Parking Lot: 20 lux horizontal, 10 lux vertical [Refer to table F-9](#)
 - Pedestrian Walkways: 20 lux horizontal
- Colour temperature—4000K preferred, 3500K minimum
- CRI—80 preferred, 70 minimum

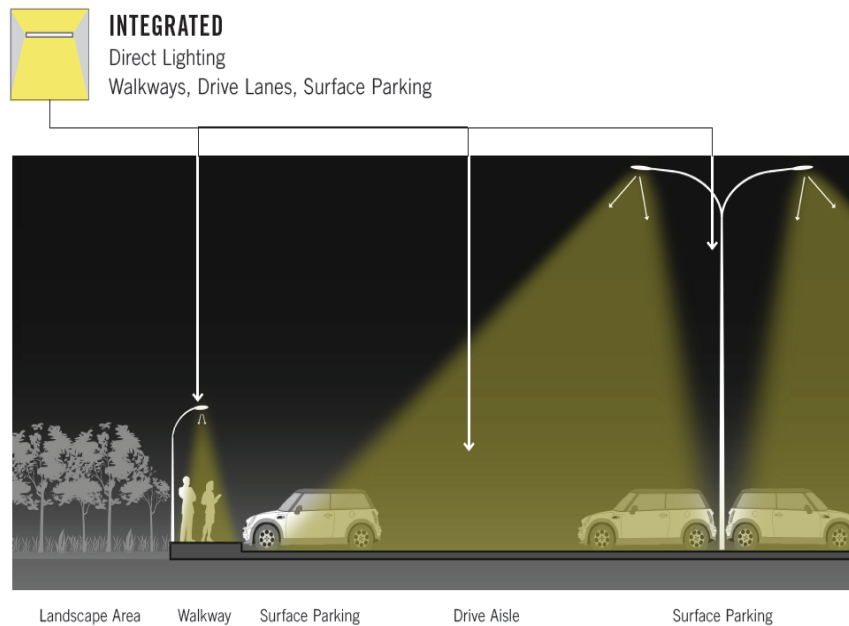

P SURFACE PARKING

Figure F-7: Lighting Design Requirements-Surface Parking