


CI-0807

## TAB 8 HEAVY RAIL Structure Interface

FIGURE: ONE WAY SERVICE ROAD (SURFACE AT TOP OF TIES)



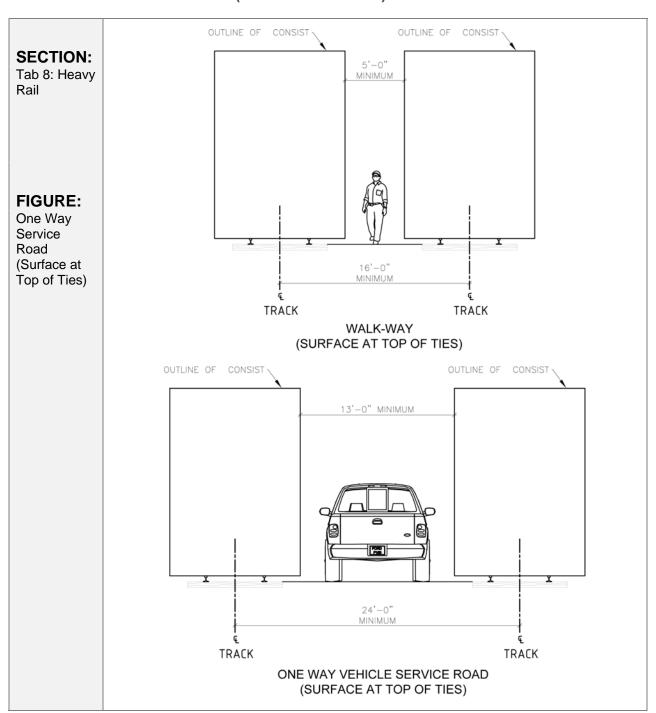

CI-0807

## **TAB 8 HEAVY RAIL**

Structure Interface

FIGURE: ONE WAY SERVICE ROAD WITH DRAINAGE DITCH (SURFACE AT TOP OF TIES)

## **SECTION:** OUTLINE OF CONSIST OUTLINE OF CONSIST Tab 8: Heavy Rail MINIMUM LIGHT POLE W/CONC. BASE FIGURE: One Way Service Road With 3'-0" 3'-0" 13'-0" MINIMUM 30'-0" MINIMUM Drainage Ditch (Surface at TRACK TRACK Top of Ties) ONE-WAY VEHICLE SERVICE ROAD WITH LIGHTING POLES 76 M (250') TO 91 M (300') APART (SURFACE AT TOP OF TIES) OUTLINE OF CONSIST OUTLINE OF CONSIST 19'-0" MINIMUM 30'-0" MINIMUM TRACK TRACK ONE-WAY VEHICLE SERVICE ROAD DRAINAGE DITCH (SURFACE AT TOP OF TIES)