



CI-0204


TAB 2: SITE INFRASTRUCTURE AND DEVELOPMENT
Pavement and Line Markings

FIGURE: DESIGNATED PARKING - CONFIGURATION FOR TWO OR LESS PARKING SPOTS

SECTION:
Tab 2: Site Infrastructure and Development

FIGURE:
Designated Parking – Configuration for Two or Less Parking Spots

DESIGNATED PARKING CONFIGURATION FOR TWO OR LESS PARKING SPOTS

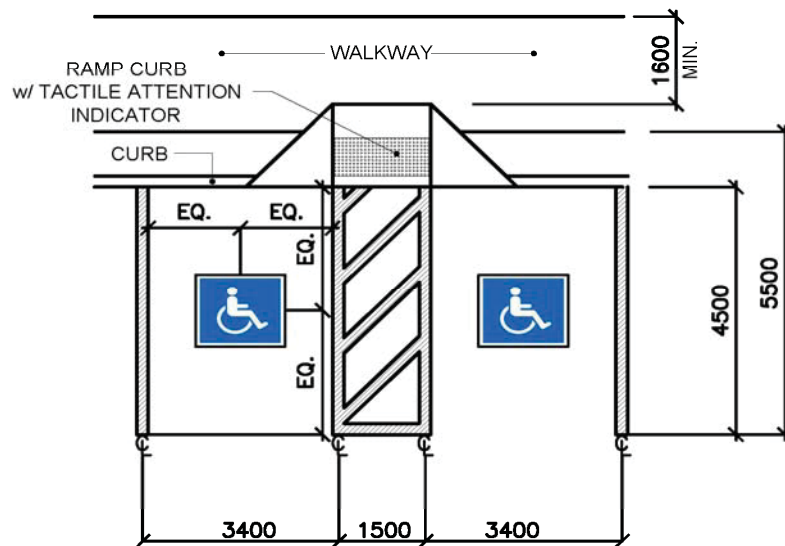

NOTES:

- RECOMMENDED UNOBSTRUCTED ACCESSIBLE ROUTE SHALL BE MINIMUM 1600 mm WIDE
- SEE ALSO LINE MARKING FOR CROSSWALKS

COLOR : LINE MARKING : REFER TO TAB 2: SECTION C1-0204 LINE MARKINGS CHART .
WHEELCHAIR SYMBOL: REFER TAB 2, SECTION C1-0203 BARRIER FREE PARKING STALLS FOR COLOUR SCHEME

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS