




CI-0204

TAB 2: SITE INFRASTRUCTURE AND DEVELOPMENT
Pavement and Line Markings

FIGURE: DESIGNATED PARKING - CONFIGURATION OF MULTIPLE PARKING SPOTS (MORE THAN TWO)

SECTION:
Tab 2: Site Infrastructure and Development

FIGURE:
Designated parking – Configuration of Multiple Parking Spots (More than Two)

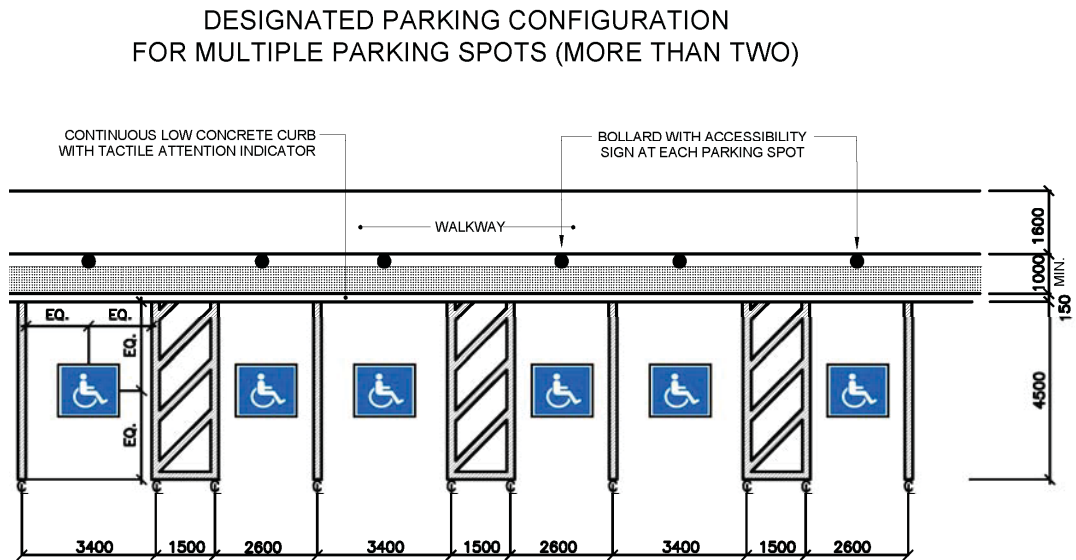

NOTE:

THE RECOMMENDED MAXIMUM PATH OF TRAVEL SHALL NOT EXCEED 30 m, FROM LAST ACCESSIBLE PARKING SPOT TO THE NEAREST ENTRANCE.

THE MAXIMUM NUMBER OF BARRIER FREE PARKING SPOTS IN ONE ROW SHALL NOT EXCEED 8 SPACES INCLUDING 4 HATCHED UNLOADING AREA.

COLOR : LINE MARKING : REFER TO TAB 2: SECTION C1-0204 LINE MARKINGS CHART.
WHEELCHAIR SYMBOL: REFER TAB 2, SECTION C1-0203 BARRIER FREE PARKING STALLS FOR COLOUR SCHEME