

TIE SPACING STRAP

STRAPS	A	B ±1/16	C ±1/16	D ±1/16	E ±1/8	WEIGHT (LBS.)	REPLACED BY	
							MARK No.	GTS DWG.
356 A	2-3/4	23-1/2	22	20	71	24.82		
356 B	1-7/16	3-3/8	22-3/8	3-3/8	32	10.80		
356 C	1-9/16	3-3/8	18-1/8	3-3/8	28	9.38		
356 D	2-1/16	3-3/8	15-1/8	3-3/8	26	8.68		
356 F	1-9/16	3-3/8	18-5/8	3-3/8	28-1/2	9.8		
356 G	1-9/16	3-3/8	17-5/8	3-3/8	27-1/2	9.4		


NOTES

- 1/2" MIN. IDENTIFICATION CHARACTERS TO BE STAMPED CLEARLY ON EACH STRAP AS SHOWN.
- WHEN REFERRING TO STRAPS, DRAWING NUMBER AND LETTER MUST BE STATED TO INDICATE SPECIFIC STRAP REQUIRED.
- NOTE: ALL STRAPS ARE MADE FROM 1/2" THICK STEEL.

MATERIAL

STRAPS TO CONFORM TO THE LATEST REVISION OF A.S.T.M. SPECIFICATION FOR A-36 COMMERCIAL QUALITYHOT ROLLED BAR STEEL CHEMICAL REQUIREMENTS:

	MIN.	MAX.
CARBON	0.25 %	0.29 %
MANGANESE	-	-
PHOSPHORUS		0.04 %
SULPHUR		0.05 %
SILICON		0.40 %

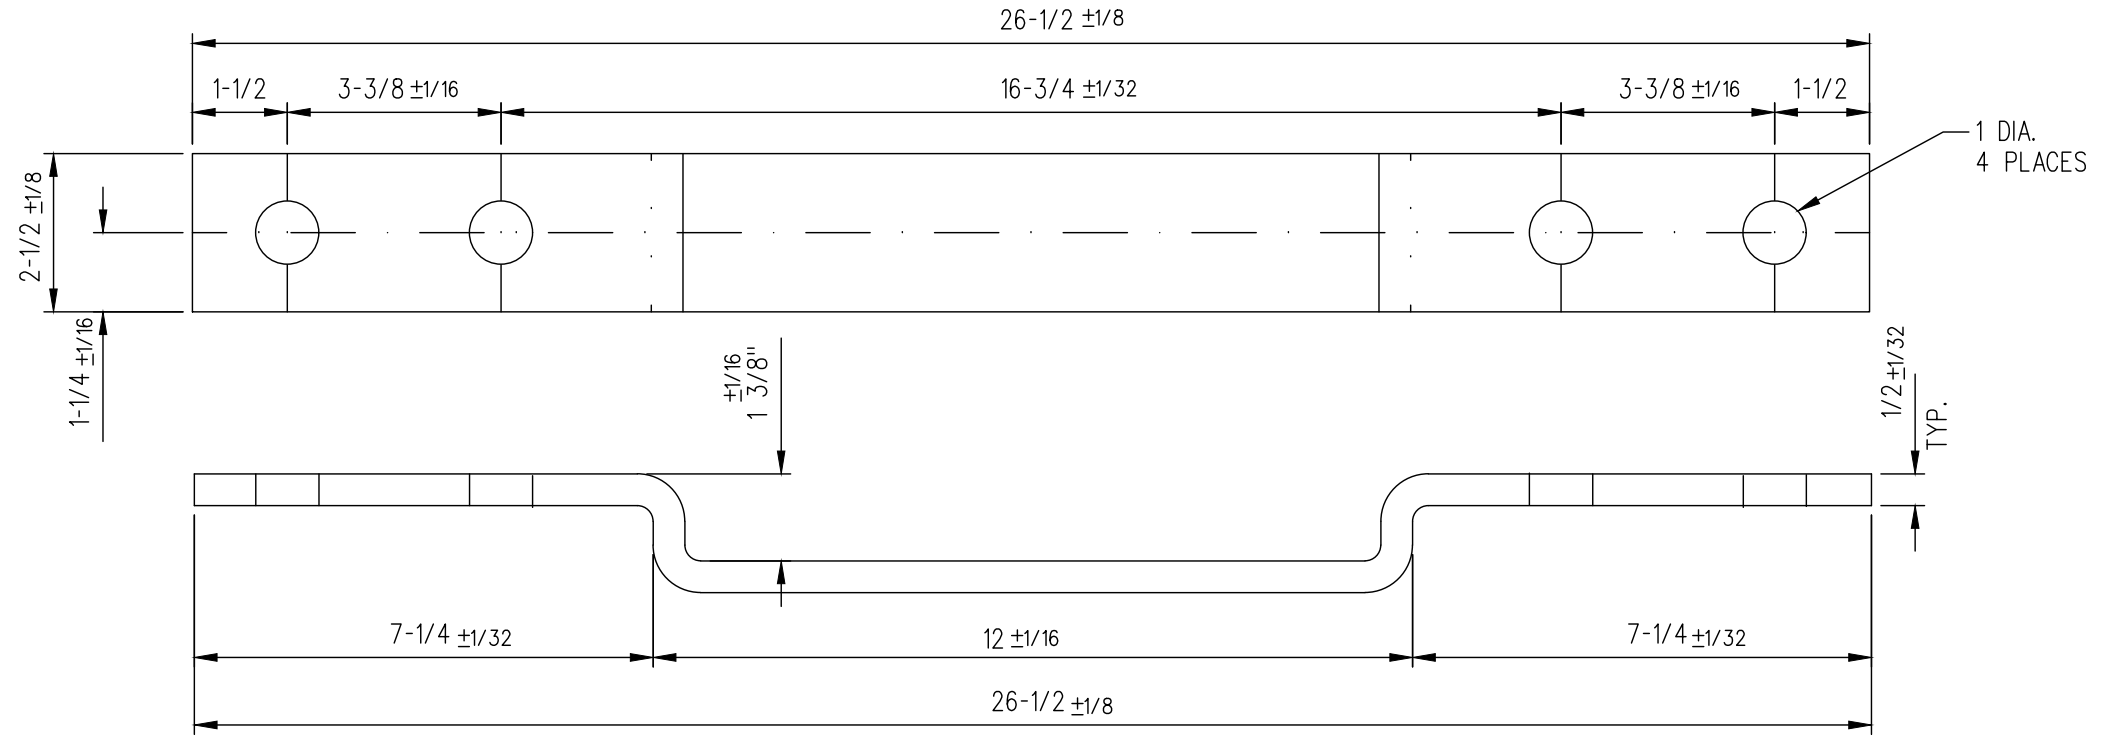

STRAP 356E
WEIGHT 9.82 LBS.

METRIC CONVERSION: 1 inch=25.4mm, 1 foot=304.8mm

1	18/07/27	ADDED IMPERIAL TO METRIC CONVERSION NOTE	
No.	Date	Revision	By Approved

Standard / **TIE SPACING STRAPS FOR POWER AND SPRING OPERATED SWITCHES**

Drawn GEK Checked GWM Approved *[Signature]* VP Engineering & Asset Management

METROLINX

Date SEPT 15/2017 Plan Number GTS-0356 Rev 1

REFERENCE: TS-0356_R4 Sheet 1 OF 1