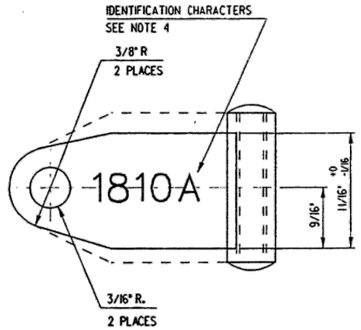

TOP VIEW



DETAIL

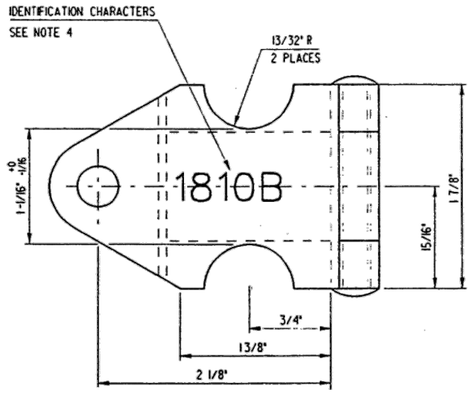

TOP VIEW

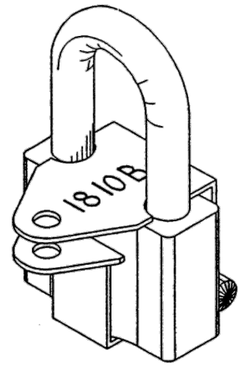

DETAIL

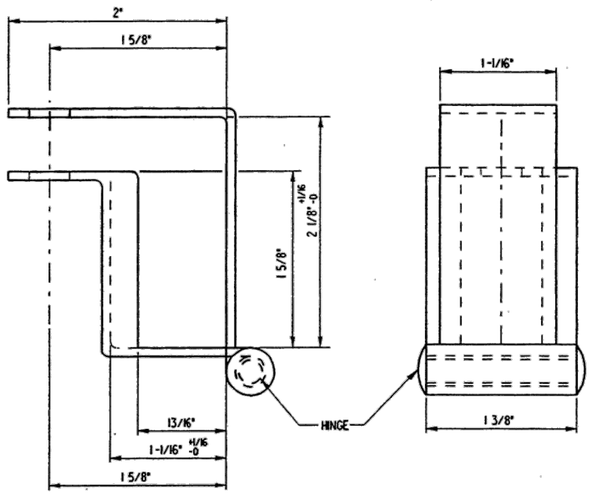

SIDE VIEW

BACK VIEW

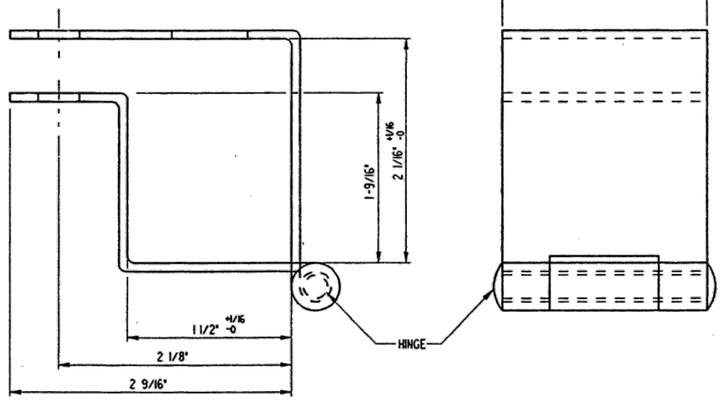

SIDE VIEW

BACK VIEW

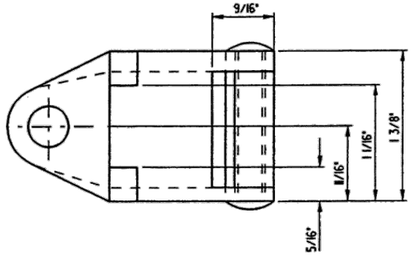

BOTTOM VIEW

" C N R "
STANDARD SWITCH LOCK
LOCK OUT 1810 "A"

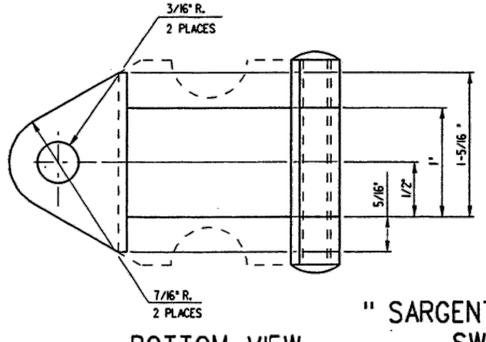

BOTTOM VIEW

" SARGENT & GREENLEAF "
SWITCH LOCK
LOCK OUT 1810 "B"

NOTES

1.- ALL DIMENSIONS ARE IN INCHES

2.- ALL TOLERANCES TO BE ± 1/16 UNLESS OTHERWISE STATED

3.- WHEN REFERRING TO SWITCH LOCK LOCKOUTS, DRAWING NUMBER MUST BE STATED AS "A" OR "B" TO INDICATE SPECIFIC SWITCH LOCK LOCKOUT REQUIRED

4.- IDENTIFICATION CHARACTERS TO BE 1/4" MINIMUM HEIGHT

5.- SWITCH LOCK LOCKOUTS TO BE 14GA (1/16") MILD STEEL

6.- REFER TO APPLICATION OF SPECIAL LOCK- CANADIAN RAIL OPERATING RULES "C.R.O.R." 40.1 (i) WHEN SWITCH LOCK IS IN PLACE.

7.- LOCKOUTS TO BE GALVANIZED OR PAINTED WITH A CORROSION RESISTANT FINISH.

METRIC CONVERSION: 1 inch=25.4mm, 1 foot=304.8mm

No.	Date	Revision	By Approved
1	18/07/27	ADDED IMPERIAL TO METRIC CONVERSION NOTE	

Standard/

SWITCH LOCK LOCKOUTS

Drawn MG | Checked GGS | Approved VP Engineering & Asset Management

METROLINX

Date DEC 15, 2017 | Plan Number GTS-1810 A/B Rev 1

REFERENCE: TS-1810 A/B | Sheet 1 OF 1