



THESE THREE TIES TO BE REMOVED AND REPLACED BY TWO TIES CUT IN HALF WITH HALVES BOLTED TOGETHER AND INSTALLED AS SHOWN

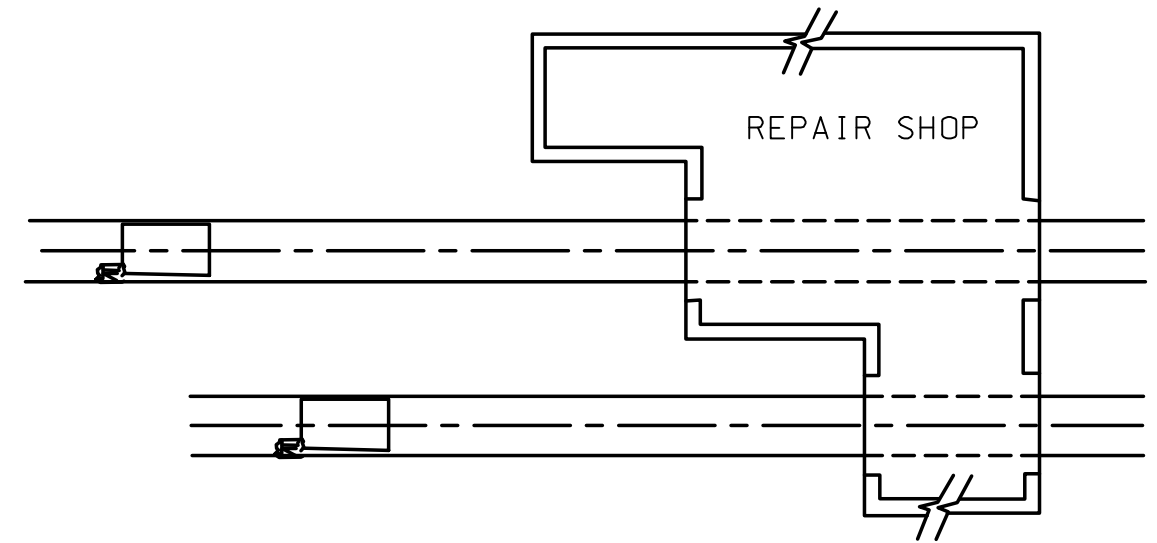

PIT LOCATION DETAIL

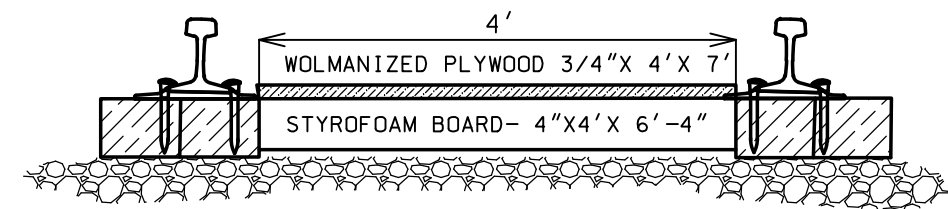

SECTION A-A

NOTES:

- 1- DERAILS MUST BE INSTALLED IN ACCORDANCE WITH THE PROVISIONS OF RM AND GTS-2208 OR GTS-2209.
- 2- DERAIL PIT TO BE INSTALLED AT ENTRANCE AND EXIT TRACKS OF MAIN AND RUNNING REPAIR SHOPS. NOT LESS THAN 40' FROM DOORS.

ROOFING NAILS (AS REQUIRED)

METRIC CONVERSION: 1 inch=25.4mm, 1 foot=304.8mm

No.	Date	Revision	By	Approved
0	18/08/31	REVISED PDF VERSION ESTABLISHED		

Standard/ **INSTALLATION DETAILS DERAIL PIT**

Drawn MG Checked GGS Approved *Kelly* VP Engineering & Asset Management



METROLINX

Date AUG 31/2018 Plan Number GTS-2212 Rev 0

REFERENCE: TS-2212

Sheet 1 OF 1