


REFER TO DWG MXS-200-001— — DETAIL 1 FOR CONNECTION DETAILS DISCONNECT -ENCLOSURE 4X2/O AWG GROUND— WIRE IN CONDUIT 1800mm (71") - 2/0 AWG GROUND WIRE TO GROUND GRID NATIVE SOIL-


DETAIL 3 - GRADIENT CONTROL MAT


	<u>Detail 1 — Grounding rod assembly connection detail</u>						UNIT	MATERIAL DESCRIPTION	MANUFACTURER & CAT. NO.
					1	4	EA	COPPER CLAD STEEL GROUND ROD 3M X 20MM (10' X 3/4")	(GENERIC)
ITEM	QTY	UNIT	MATERIAL DESCRIPTION	MANUFACTURER & CAT. NO.	2	1	EA	CU GROUND MESH, 4' X 6', 6", #6 AWG	BURNDY: BGM640066 OR EQUIVALENT
1	1	EA	COPPER CLAD STEEL GROUND ROD 3M X 20MM (10' X 3/4")	(GENERIC)	3	1	EA	CABLE TERMINAL TO GROUND ROD	BURNDY: B-518 OR EQUIVALENT
2	1	EA	TERMINAL WIRE TO GROUND ROD EXOTHERMIC WELDING CONNECTION	BURNDY: B-518 OR EQUIVALENT	4	PER DESIGN	N/A	51mm CONDUIT	(GENERIC)
3	1	EA	GROUND WIRE TO GROUND ROD EXOTHERMIC WELDING TEE CONNECTION	BURNDY: B-561 OR EQUIVALENT	5	2	EA	51mm CONDUIT CLAMP	T&B: 1281 OR EQUIVALENT
4	1	EA	THROUGH WIRE TO GROUND ROD EXOTHERMIC WELDING CONNECTION	BURNDY: B-2160 OR EQUIVALENT	6	2	EA	BUSHING	(GENERIC)

NOTES:

1. THE DEPTH OF THE GROUNDING GRID WILL DEPEND ON LOCAL SITE CONDITIONS AND MUST BE DETERMINED BY THE CONTRACTOR BEFORE INSTALLATION. 500mm IS A TYPICAL VALUE THAT HAS BEEN PROVIDED FOR REFERENCE.

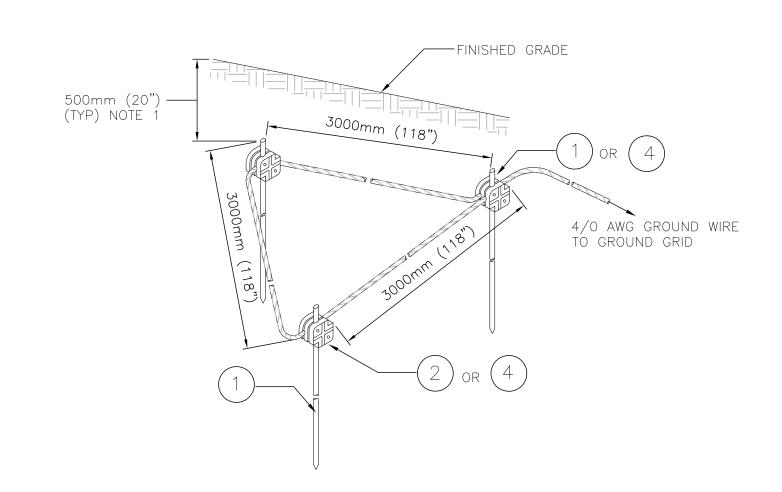

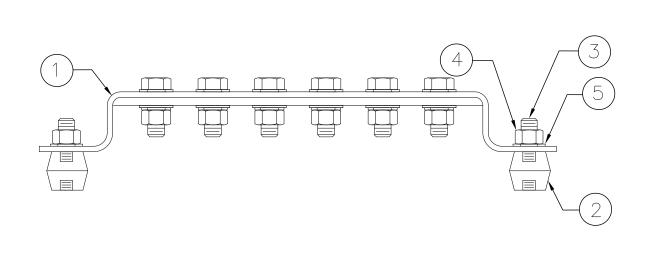

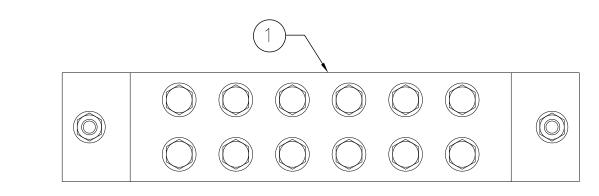

DETAIL 4 - GROUNDING COPPER BAR ASSEMBLY

DETAIL 2 — REMOTE GROUNDING ASSEMBLY									ITEM	QTY	UNIT	MATERIAL DESCRIPTION	MANUFACTURER & CAT. NO.		
<u> </u>				ITFM	1 QTY	LINIT	T MATERIAL DESCRIPTION	MANUFACTURER & CAT. NO.		+			FIDOV, AD1094CUSSI OD		
S S. L		0.7	, , , , , ,			116141		01111	WATERWALE BESOME THOM		1	1	EA	NEMA 4X WITH STAINLESS STEEL LOCKABLE LATCH AND MOUNTING PANEL	FIBOX: AR1084CHSSL OR EQUIVALENT
/ENT	IEM	QIY	' UNI	MATERIAL DESCRIPTION	MANUFACTURER & CAT. NO.	1	1	EA	COPPER GROUND BUS BAR 6mm x 50mm x 300mm (4" x 2" x 12") MIN		2	1	EA	COPPER GROUND BUS 6mm x 50mm x 300mm (4" x 2" x 12") MIN	(GENERIC)
AGEN	1	3	EA	A COPPER CLAD STEEL GROUND ROD 3M X 20MM (10' X 3/4")	(GENERIC)	2	2	EA	FIBERGLASS REINFORCED POLYESTER INSULATOR W/12mm (1/2") - 13 THREADED HOLES	ERICO: 559686 OR EQUIVALENT	3	2	EA	FIBERGLASS REINFORCED POLYESTER INSULATOR W/12mm (1/2") - 1. THREADED HOLES	ERICO: 559686 OR EQUIVALENT
MAN	2	2	EA	A THROUGH GROUND WIRE TO GROUND ROD EXOTHERMIC CONNECTION	BURNDY: B-1596 OR EQUIVALENT	3	2	EA	BRONZE BOLT 12MM - 13x25mm (Γ'' - 13x1")		4	2	EA	BRONZE BOLT 12MM - 13x25mm (μ" - 13x1")	
3RAM	3	1	EA	A THROUGH GROUND WIRE TO GROUND ROD EXOTHERMIC CONNECTION	BURNDY: B-2566 OR EQUIVALENT	4	2	EA	LOCK WASHER, BRONZE, 1/2"	(GENERIC)	5	2	EA	LOCK WASHER, BRONZE, 1/2"	(GENERIC)
PRO	4	3	EA	A THROUGH GROUND WIRE TO GROUND ROD MECHANICAL CONNECTION	BURNDY: GP6429 OR EQUIVALENT	5	2	EA	INSULATED WASHER, 1/2"			2	EA	INSULATED WASHER, 1/2"	
70 V				TEEDENIAE DOMINIAC ICCLIE			//CIONC		DRAWNI RY: DESIGNED RY:		_		·		


3 S	REFERENCE DRAWINGS		ISSUE		REVISIONS		DESIGNED BY:
1/60/(RCW 14/12/11	SXF 14/12/11
LKI)1\DEP		3 15/04/06	FINAL DESIGN			CHECKED BY:	APPROVED BY: 7BT
GDC		2 15/03/06	100% DESIGN			15/01/16	15/01/16
E P		1 15/02/09	90% DESIGN			SCALE: NTS	FULL SIZE ONLY
ED B FILE-		0 15/01/16	60% DESIGN				
	DWG NO. TITLE	NO. DATE	ISSUED FOR	REV. DATE			

PARSONS BRINCKERHOFF **METROLINX**

TRACTION ELECTRIFICATION GROUNDING AND BONDING

STANDARD INSTALLATION DESIGN DETAILS GROUNDING EQUIPMENT ASSEMBLIES

REV. SHEET DWG. NO. CONTRACT NO. RQQ-2011-PP-032 MXS-100-005

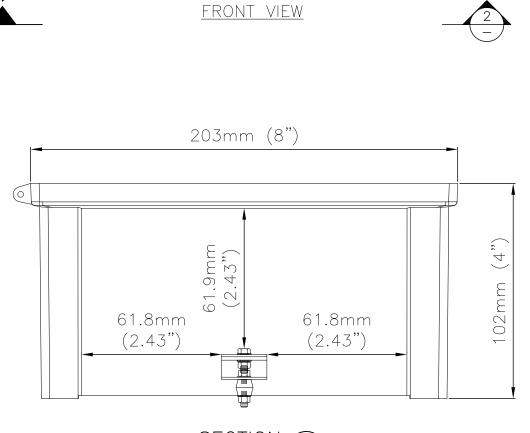

1. INSTALL NON-METALLIC ENCLOSURES COMPLETE WITH GROUNDING BAR.

75.2mm (2.96")

203mm (8")

00


00

00 00

75.2mm (2.96")

2. ENCLOSURES SHALL BE NEMA 4X WITH STAINLESS STEEL LOCKABLE LATCH AND MOUNTING PANEL.

NOTES:

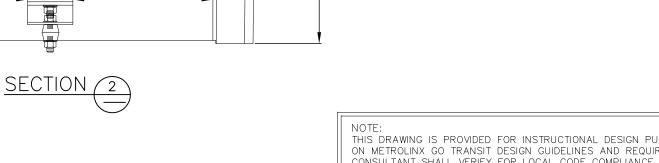

THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, EXISTING SITE CONDITIONS AND INTER DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

102mm (4")

(2.45")

-SEE DETAIL 4

SECTION (1)

