

CI-0204


**TAB 2: SITE INFRASTRUCTURE AND DEVELOPMENT**  
Pavement and Line Markings

FIGURE: DESIGNATED PARKING - CONFIGURATION FOR TWO OR LESS PARKING SPOTS

**SECTION:**  
Tab 2: Site Infrastructure and Development

**FIGURE:**  
Designated Parking – Configuration for Two or Less Parking Spots

**DESIGNATED PARKING CONFIGURATION FOR TWO OR LESS PARKING SPOTS**

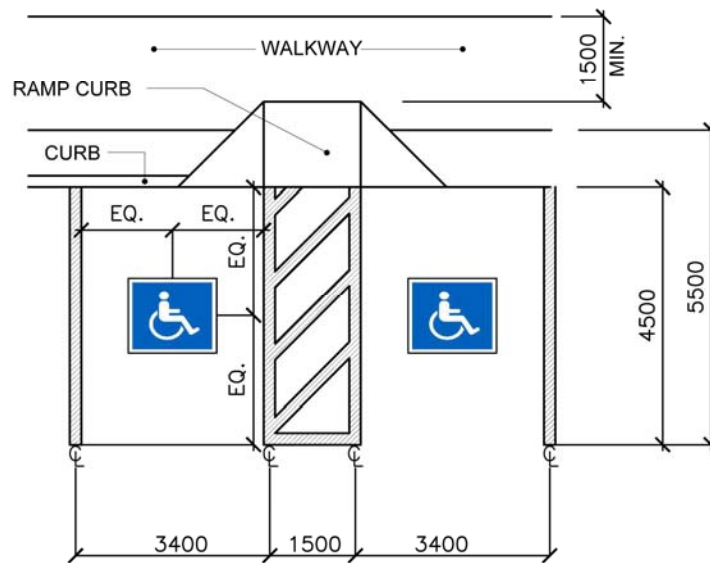

**NOTES:**

- RECOMMENDED UNOBSTRUCTED ACCESSIBLE ROUTE SHALL BE MINIMUM 1500 mm WIDE
- SEE ALSO LINE MARKING FOR CROSSWALKS

COLOR : LINE MARKING : REFER TO TAB 2: SECTION C1-0204 LINE MARKINGS CHART .  
WHEELCHAIR SYMBOL: REFER TAB 2, SECTION C1-0203 BARRIER FREE PARKING STALLS FOR COLOUR SCHEME

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS




CI-0204

**TAB 2: SITE INFRASTRUCTURE AND DEVELOPMENT**  
Pavement and Line Markings

FIGURE: DESIGNATED PARKING - CONFIGURATION OF MULTIPLE PARKING SPOTS (MORE THAN TWO)

**SECTION:**  
Tab 2: Site Infrastructure and Development

**FIGURE:**  
Designated parking – Configuration of Multiple Parking Spots (More than Two)

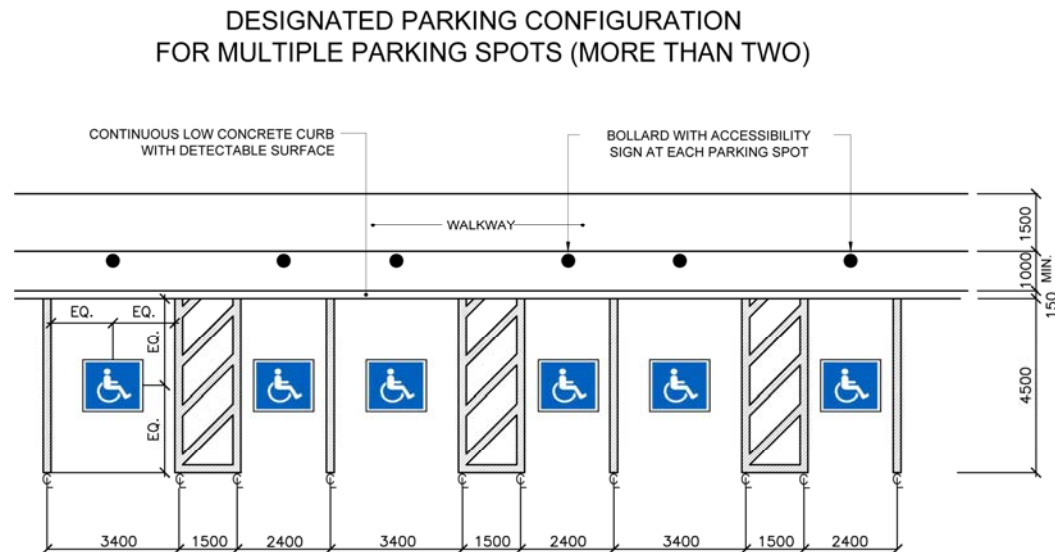

**NOTE:**

THE RECOMMENDED MAXIMUM PATH OF TRAVEL SHALL NOT EXCEED 30 m, FROM LAST ACCESSIBLE PARKING SPOT TO THE NEAREST ENTRANCE.

THE MAXIMUM NUMBER OF BARRIER FREE PARKING SPOTS IN ONE ROW SHALL NOT EXCEED 8 SPACES INCLUDING 4 HATCHED UNLOADING AREA.

COLOR : LINE MARKING : REFER TO TAB 2: SECTION C1-0204 LINE MARKINGS CHART .  
WHEELCHAIR SYMBOL: REFER TAB 2, SECTION C1-0203 BARRIER FREE PARKING STALLS FOR COLOUR SCHEME